


Speed Controller with One-touch Fittings

In-line Type

RoHS

New

In-line



Brass



Stainless steel




Reduces labor time!

Easy to use

Push-lock type

Knob O.D.: Almost doubled!

• Easy to lock

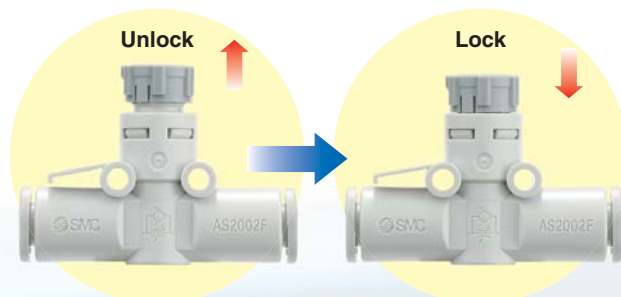


Current type

New Push-lock type

One-push to lock

Much easier to lock than current type using a wrench

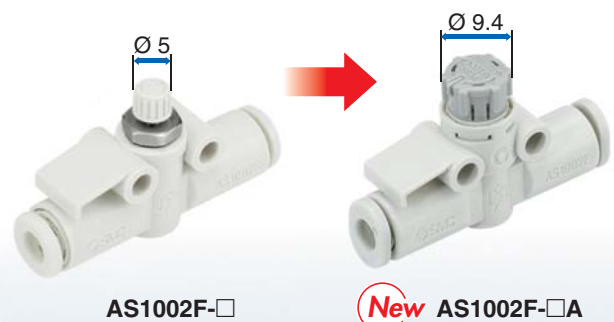


AS1002F-□

New AS1002F-□A


Mounting Variations

• Direct mounting




• Holder mounting

Page 10



• L-bracket mounting


Page 4



L-bracket

• DIN rail mounting

Page 4

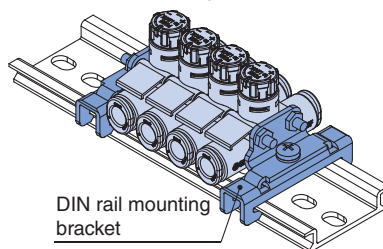

DIN rail mounting bracket



AS Series




CAT.EUS20-243A-UK

Flow Rate Reproducibility




Improved reproducibility of flow rate

Stable knob position when fully closed (no flow rate) onto the contact face stopper (rotating stopper). Small variations in flow rate depending on the number of knob rotations

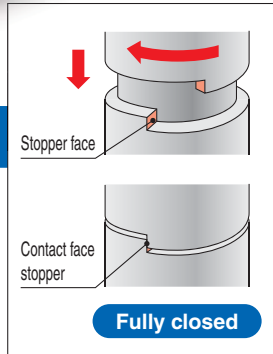


Lightweight

Weight: Approx. **27 % lighter**

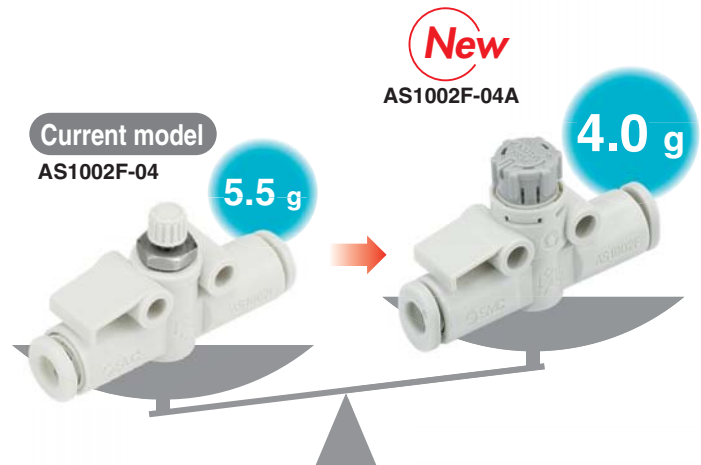

Larger Knob

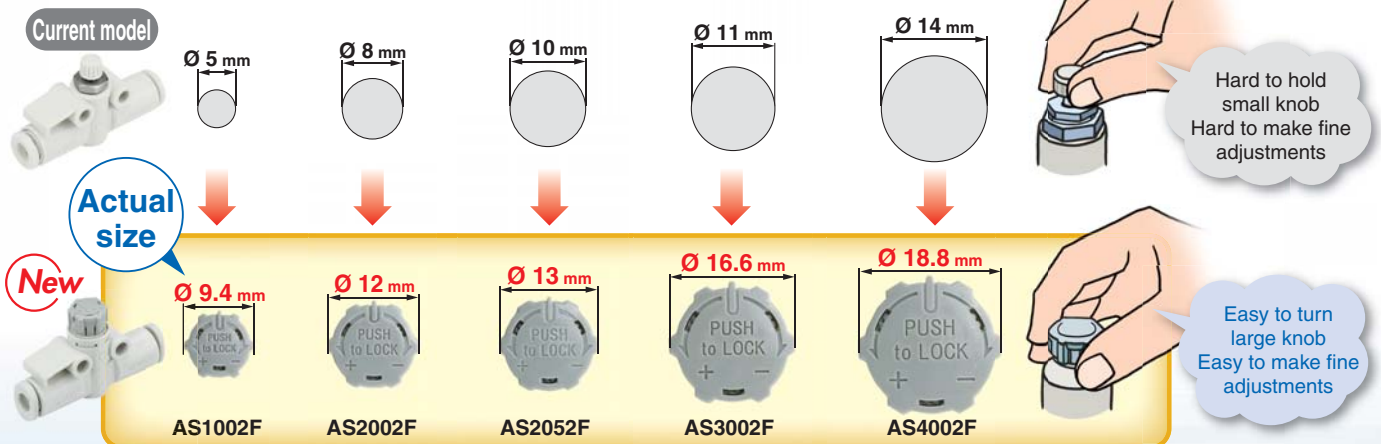

Easy Identification of Product Type

By index plate

It is possible to identify the product when multiple controllers are mounted and identify the flow direction by attaching an identification label.





(Example with identification label attached)

By colour

Model	Release button colour	
	Metric	Inch
AS□2F <small>Page 3</small>	Light grey	Orange
AS□2FG <small>Page 8</small>	White	White


Series Variations

⊙ Electroless nickel plating type is standardised. ⊙ Stainless steel type is standardised.

	Model	Applicable tubing O.D.												Metal parts material	Applicable tubing material
		Metric size						Inch size							
		3.2	4	6	8	10	12	1/8"	5/32"	1/4"	5/16"	3/8"	1/2"		
	AS1002F	●	●	●				●	●	●				· Brass · Stainless steel	Nylon (T, TIA series) Soft nylon (TS, TISA series) Polyurethane (T, TIUB series) Fluoropolymer (TLM, TILM series) (TH, TIH series)
	AS2002F		●	●					●	●					
	AS2052F			●	●					●	●				
	AS3002F			●	●	●	●			●	●	●			
	AS4002F					●	●					●	●		
															

Push-Lock Series Variations

Speed Controller with One-touch Fitting AS Series

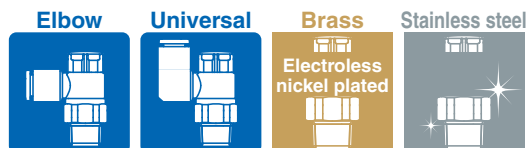


Push locking allows the needle to lock easily.

Body size	Port size	Applicable tubing O.D.	
		Metric size	Inch size
1 to 4	M5 to 1/2	Ø 2 to Ø 16	Ø 1/8" to Ø 1/2"




Refer to the catalogue on www.smc.eu for details.

Speed Controller with Indicator AS-FS Series

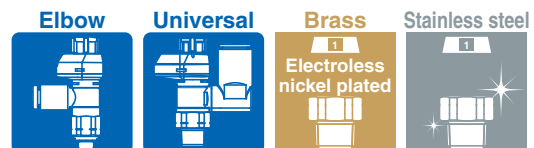

Numerical indication of knob rotation for flow rate reduces flow setting time and setting errors!

Body size	Port size	Applicable tubing O.D.	
		Metric size	Inch size
1 to 4	M5 to 1/2	Ø 2 to Ø 16	Ø 1/8" to Ø 1/2"



Refer to the catalogue on www.smc.eu for details.


Speed Controller with One-touch Fittings In-line Type **AS Series**



RoHS

In-line

Brass



Model

Model	Applicable tubing O.D.											
	Metric size						Inch size					
	3.2	4	6	8	10	12	1/8"	5/32"	1/4"	5/16"	3/8"	1/2"
AS1002F	●	●	●				●	●	●			
AS2002F		●	●					●	●			
AS2052F			●	●					●	●		
AS3002F			●	●	●	●			●	●	●	
AS4002F					●	●					●	●

Specifications

Fluid	Air
Proof pressure	1.5 MPa
Max. operating pressure	1 MPa
Min. operating pressure	0.1 MPa
Ambient and fluid temperature	-5 to 60 °C (No freezing)
Applicable tubing material	Nylon, Soft nylon, Polyurethane*, FEP, PFA

*1: Use caution at the max. operating pressure when using soft nylon or polyurethane tubing. (Refer to the catalogue on www.smc.eu for details.)

Flow Rate and Sonic Conductance


Model		AS1002F-□A			AS2002F-□A		AS2052F-□A		AS3002F-□A				AS4002F-□A	
Tubing O.D.	Metric size	Ø 3.2	Ø 4	Ø 6	Ø 4	Ø 6	Ø 6	Ø 8	Ø 6	Ø 8	Ø 10	Ø 12	Ø 10	Ø 12
	Inch size	Ø 1/8"	Ø 5/32"	Ø 1/4"	Ø 5/32"	Ø 1/4"	Ø 1/4"	Ø 5/16"	Ø 1/4"	Ø 5/16"	Ø 3/8"	—	Ø 3/8"	Ø 1/2"
C values: Sonic conductance dm³/(s·bar)	Free flow	0.3	0.4	0.6	0.4	0.6	1.0	1.2	1.1	1.6	2.2	2.6	2.4	3.5
	Controlled flow	0.3			0.4	0.6	1.0	1.2	1.3	1.9	2.7	3.3	2.8	4.1
b values: Critical pressure ratio	Free flow	0.3	0.2		0.3	0.1	0.2		0.2				0.3	0.2
	Controlled flow	0.2	0.3	0.4	0.2		0.2	0.3	0.1		0.2		0.1	0.2

*: C and b values are for controlled flow with the needle fully open and free flow with the needle fully closed.

*: The same specifications also apply to the AS-FG series (stainless steel type).

Flow Direction
Symbol on Body

Symbol



How to Order

AS 200 2 F - 06 A

Body size

100	M5 standard
200	1/8 standard
205	1/4 standard
300	3/8 standard
400	1/2 standard

With One-touch fittings

Push-lock type

Applicable tubing O.D.*1

Metric size	Inch size
23 Ø 3.2*2	01 Ø 1/8"
04 Ø 4	03 Ø 5/32"
06 Ø 6	07 Ø 1/4"
08 Ø 8	09 Ø 5/16"
10 Ø 10	11 Ø 3/8"
12 Ø 12	13 Ø 1/2"

*1: For selecting applicable tubing O.D., refer to the "Model" shown above.

*2: Use Ø 1/8" tubing.


Caution

Be sure to read this before handling the products.
Refer to the back cover for Safety Instructions.
For Flow Control Equipment Precautions, refer to the "Operation Manual" on the SMC website, <http://www.smc.eu>

Options


① L-Bracket

Part no.	Applicable model	Quantity
AS-10L	AS1002F□	2
AS-20L	AS2002F□	
AS-25L	AS2052F□	
AS-30L	AS3002F□	
AS-40L	AS4002F□	

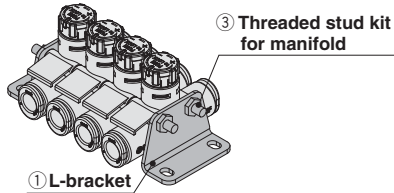

② DIN Rail Mounting Bracket

Part no.	Applicable model	Quantity
AS-10D	AS1002F□	2
AS-20D	AS2002F□	
AS-25D	AS2052F□	
AS-30D	AS3002F□	
AS-40D	AS4002F□	

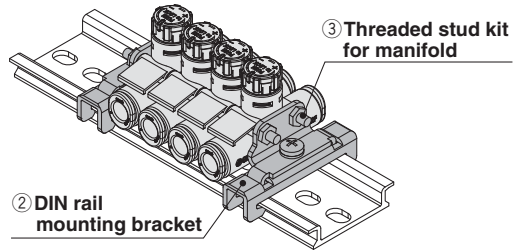

※: Prepare DIN rail by user.

③ Threaded Stud Kit for Manifold: Metric Size

Part number				Applicable model	
4 stations	6 stations	8 stations	10 stations		
AS-32B	AS-33B	AS-35B	AS-36B	AS1002F□-23A	
	AS-34B	AS-36B	AS-37B	AS1002F□-04A	
			AS-38B	AS1002F□-06A	
AS-32B	AS-34B	AS-36B	AS-37B	AS2002F□-04A	
			AS-38B	AS2002F□-06A	
				—	
AS-41B	AS-42B	AS-44B	AS-45B	AS2052F□-06A	
				—	
				AS2052F□-08A	
AS-42B	AS-44B	AS-45B	AS-47B	AS3002F□-06A	
				—	
				AS3002F□-08A	
		AS-46B		AS3002F□-10A	
				—	
				AS3002F□-12A	
AS-43B	AS-45B	AS-47B	AS-48B	AS4002F□-10A	
				—	
				AS4002F□-12A	
				—	

③ Threaded Stud Kit for Manifold: Inch Size

Part number				Applicable model	
4 stations	6 stations	8 stations	10 stations		
AS-32B	AS-33B	AS-35B	AS-36B	AS1002F□-01A	
	AS-34B	AS-36B	AS-37B	AS1002F□-03A	
			—	—	
			AS-38B	AS1002F□-07A	
AS-32B	AS-34B	AS-36B	AS-37B	AS2002F□-03A	
			AS-38B	—	—
				AS2002F□-07A	—
AS-41B	AS-42B	AS-44B	AS-45B	—	
				AS2052F□-07A	
				AS2052F□-09A	
AS-42B	AS-44B	AS-45B	AS-47B	—	
				AS3002F□-07A	
				AS3002F□-09A	
		AS-46B		—	
				AS3002F□-11A	
				—	
AS-43B	AS-45B	AS-47B	AS-48B	—	
				AS4002F□-11A	
				—	
				AS4002F□-13A	

Details of Threaded Stud Kit for Manifold

Threaded stud			Accessories			
Part no.	Length	Quantity	Hexagon nut	Quantity	Flat washer	Quantity
AS-32B	62	2	M3	4	M3	4
AS-33B	72	2				
AS-34B	90	2				
AS-35B	104	2				
AS-36B	114	2				
AS-37B	135	2				
AS-38B	140	2	M4	4	M4	4
AS-41B	78	2				
AS-42B	111	2				
AS-43B	119	2				
AS-44B	147	2				
AS-45B	179	2				
AS-46B	191	2				
AS-47B	236	2				
AS-48B	277	2				


Ordering Example

Threaded studs for manifold are not included when L-bracket and DIN rail mounting bracket are ordered. Please order them according to the number of stations.

Ex.) AS2002F-04A

When connecting 4 pcs. and mounting L-brackets on both sides


- Speed controller
AS2002F-04A 4 pcs.
- L-bracket
AS-20L 2 pcs.
- Threaded stud kit for manifold
AS-32B 1 set

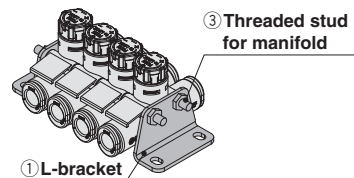


Needle Valve/Flow Rate Characteristics

*: The flow rate characteristics are representative values.


AS1002F-□A

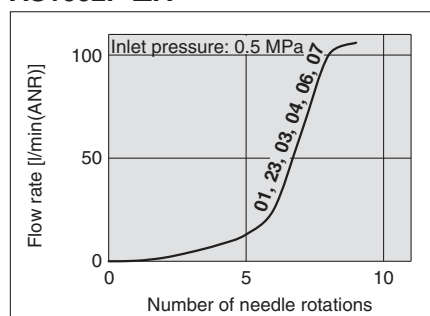


AS2002F-□A

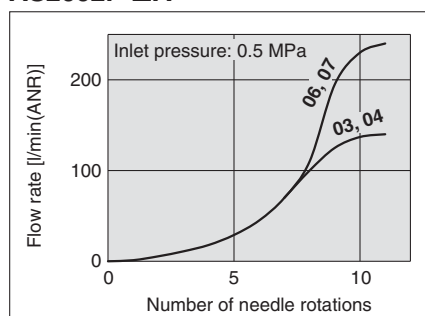


AS2052F-□A

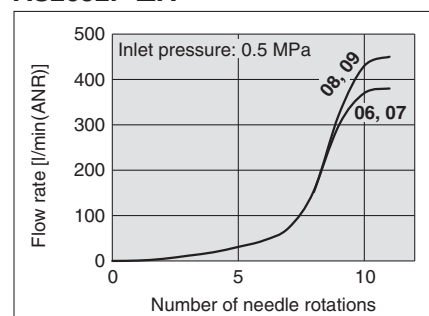

AS3002F-□A

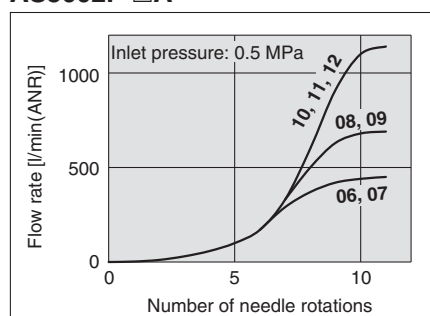


AS4002F-□A

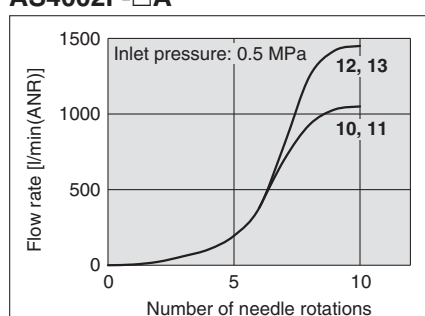

*: The numbers above the flow rate characteristic curves in the charts show the applicable tubing outside diameter as defined by the product number.

Construction

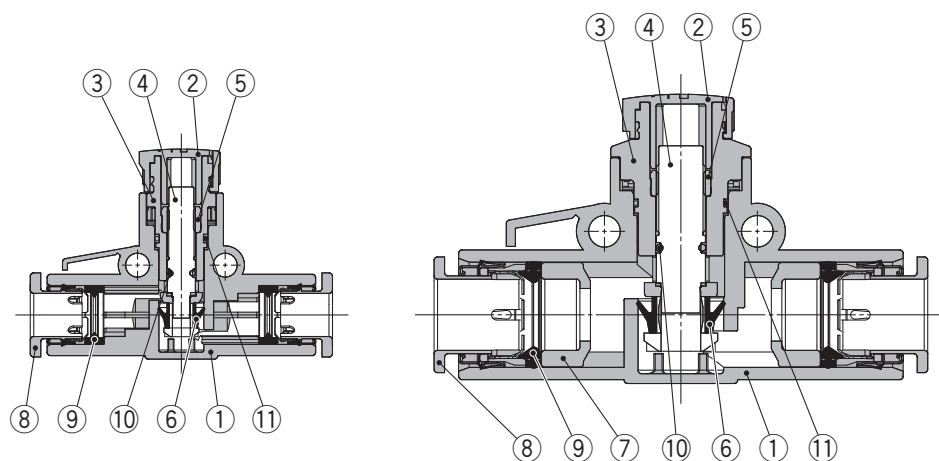


Component Parts

No.	Description	Material	Note
1	Body A	PBT	
2	Knob	POM	
3	Body B	PBT	
4	Needle	PBT	
5	Needle guide	Brass	Electroless nickel plating
6	U-seal	HNBR	
7	Spacer	PBT*1	
8	Cassette	—	
9	Seal	NBR	
10	O-ring	NBR	
11	O-ring	NBR	

*1: The AS3002F-11A, AS4002F-11A, AS4002F-13A are made of electroless nickel plated brass.


L-Bracket



Component Parts

No.	Description	Material
1	Bracket	Steel strip



DIN Rail Mounting Bracket




Component Parts

No.	Description	Material
1	Bracket	Steel strip
2	Cross recessed round head screw	Steel wire
3	Clasp	Steel strip

Dimensions

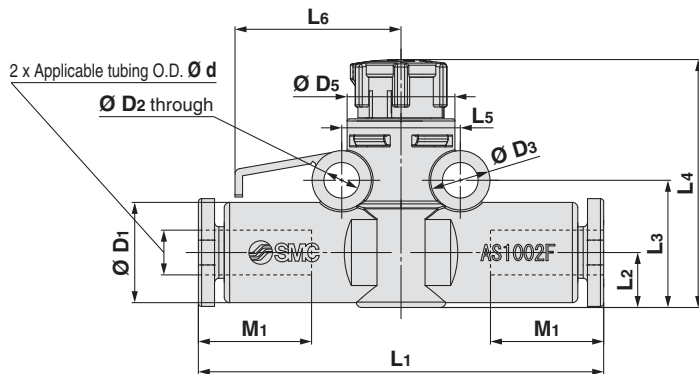

Release button dimensions



Applicable tubing O.D.: Ø 3.2, Ø 4, Ø 6
Ø 1/8", Ø 5/32"

Metric Size

Model	Applicable tubing O.D. Ø d	Ø D1	Release button dimensions Ø X(X) Y		Ø D2	Ø D3	Ø D4	Ø D5	L1	L2	L3	L4*1		L5	L6	L7	L8	M1	Weight [g]
												Max.	Min.						
AS1002F□-23A	3.2	8.4	6.7	9.5					36.6										3.7
AS1002F□-04A	4	9.3	7.7	10.0	3.3	5.5	9.4	10.0	37.6	5.1	11.8	24.1	23.0	11.0	15.4	8.8	10.1	13.5	4.0
AS1002F□-06A	6	11.6	9.7	12.0					40.1	6.1	12.8	25.1	24.0				12.3		5.0
AS2002F□-04A	4	9.3	7.7	10.0	3.3	5.5	12.0	12.0	41.3	6.3	13.4	31.4	30.0	12.6	17.0	10.5	12.3	13.5	6.1
AS2002F□-06A	6	11.6	9.7	12.0					43.1										6.9
AS2052F□-06A	6	12.8	11.5	—	4.3	7.8	13.0	16.0	52.0	7.6	17.2	36.2	34.6	17.0	22.5	12.0	16.1	13.5	11.8
AS2052F□-08A	8	15.2	13.5	—					56.0	8.5	18.1	37.1	35.5					14.6	13.8
AS3002F□-06A	6	13.2	11.5	—					57.8									13.5	18.1
AS3002F□-08A	8	15.2	13.5	—	4.3	8.0	16.6	20.0	63.8	9.8	21.7	42.9	41.3	22.0	25.0	12.0	20.5	14.6	20.0
AS3002F□-10A	10	18.5	16.5	—					68.6									16.4	24.8
AS3002F□-12A	12	20.9	18.5	—					73.8	10.9	22.8	44.0	42.4				22.1	18.4	29.1
AS4002F□-10A	10	18.5	16.5	—					74.7									16.4	36.3
AS4002F□-12A	12	21.7	18.5	—	4.3	8.0	18.8	26.0	79.1	11.3	23.7	51.3	49.7	28.0	33.0	14.0	26.2	18.4	42.0

*1: Reference dimensions

Inch Size


Model	Applicable tubing O.D. Ø d	Ø D1	Release button dimensions Ø X(X) Y		Ø D2	Ø D3	Ø D4	Ø D5	L1	L2	L3	L4*1		L5	L6	L7	L8	M1	Weight [g]
												Max.	Min.						
AS1002F□-01A	1/8"	8.4	6.7	9.5					36.6										3.7
AS1002F□-03A	5/32"	9.3	7.7	10.0	3.3	5.5	9.4	10.0	37.6	5.1	11.8	24.1	23.0	11.0	15.4	8.8	10.1	13.5	4.0
AS1002F□-07A	1/4"	12.0	10.9	—					40.1	6.2	12.9	25.2	24.1				12.8		5.2
AS2002F□-03A	5/32"	9.3	7.7	10.0	3.3	5.5	12.0	12.0	41.3	6.3	13.4	31.4	30.0	12.6	17.0	10.5	12.3	13.5	6.1
AS2002F□-07A	1/4"	12.0	10.9	—					43.2	6.5	13.6	31.6	30.2				12.8		7.1
AS2052F□-07A	1/4"	13.2	12.0	—	4.3	7.8	13.0	16.0	52.2	7.6	17.2	36.2	34.6	17.0	22.5	12.0	16.1	13.5	12.1
AS2052F□-09A	5/16"	15.2	13.5	—					56.0	8.5	18.1	37.1	35.5					14.6	13.8
AS3002F□-07A	1/4"	13.2	12.0	—					57.8									13.5	17.9
AS3002F□-09A	5/16"	15.2	13.5	—	4.3	8.0	16.6	20.0	63.8	9.8	21.7	42.9	41.3	22.0	25.0	12.0	20.5	14.6	20.0
AS3002F□-11A	3/8"	18.5	16.0	—					67.6									16.4	25.0
AS4002F□-11A	3/8"	18.5	16.0	—					74.7									16.4	36.7
AS4002F□-13A	1/2"	21.7	20.0	—	4.3	8.0	18.8	26.0	79.1	11.3	23.7	51.3	49.7	28.0	33.0	14.0	26.2	18.7	40.4

*1: Reference dimensions

Dimensions


L-Bracket

Bracket on a single side

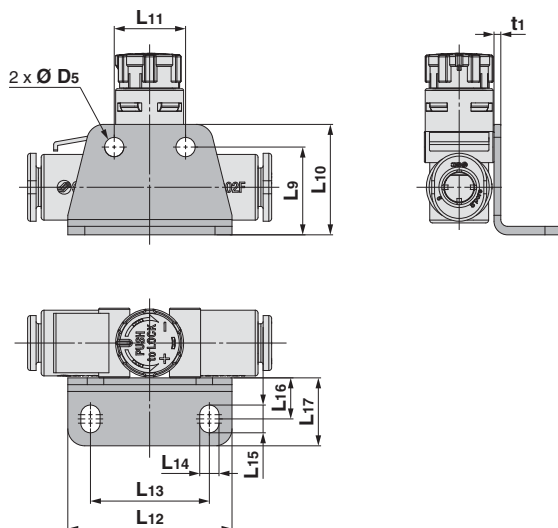

Part no.	Applicable model	D5	L9	L10	L11	L12	L13	L14	L15	L16	L17	t1
AS-10L	AS1002F□	3.4	14.8	18.3	11	27.5	19.5	3.4	4.9	7.3	12	1
AS-20L	AS2002F□		15.6	19.6	12.6	29	21	3.4	4.9	7.3	12	1.2
AS-25L	AS2052F□		19.6	24.6	17	38	28					
AS-30L	AS3002F□	4.5	24.8	29.8	22	43	33	4.5	6.5	9.5	15.5	1.4
AS-40L	AS4002F□		25.7	30.7	28	49	39					

Brackets on both sides



*: Refer to page 6 for L8.


*: The above figure shows the manifold with controllers connected using two L-brackets and a threaded stud kit for manifold. Refer to page 4 for threaded stud kits for manifold.

DIN Rail Mounting Bracket

Bracket on a single side

AS1002F□


AS2002F□

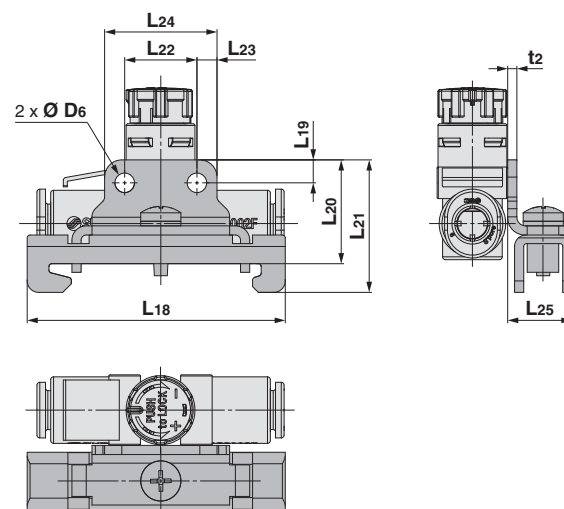

AS2052F□


AS3002F□

AS4002F□

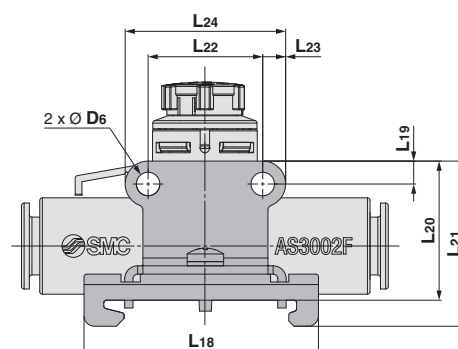

Part no.	Applicable model	D6	L18	L19	L20	L21	L22	L23	L24	L25	t2
AS-10D	AS1002F□	3.4		3.5	18.2	23.2	11		18		
AS-20D	AS2002F□				18.6	23.6	12.6	3.5	19.6		
AS-25D	AS2052F□		45		22	27	17		25.8	11.3	1.6
AS-30D	AS3002F□	4.5		4.4	27.2	32.2	22	4.4	30.8		
AS-40D	AS4002F□				28.1	33.1	28		36.8		

Brackets on both sides



*: Refer to page 6 for L8.


*: The above figure shows the manifold with controllers connected using two DIN rail mounting brackets and a threaded stud kit for manifold. Refer to page 4 for threaded stud kits for manifold.

Speed Controller with One-touch Fittings Stainless Steel Series In-line Type **AS-FG Series**



RoHS

In-line Stainless steel



Model

Model	Applicable tubing O.D.											
	Metric size						Inch size					
	3.2	4	6	8	10	12	1/8"	5/32"	1/4"	5/16"	3/8"	1/2"
AS1002FG	●	●	●				●	●	●			
AS2002FG		●	●					●	●			
AS2052FG			●	●					●	●		
AS3002FG			●	●	●	●			●	●	●	
AS4002FG					●	●					●	●

Specifications

Fluid	Air
Proof pressure	1.5 MPa
Max. operating pressure	1 MPa
Min. operating pressure	0.1 MPa
Ambient and fluid temperature	-5 to 60 °C (No freezing)
Applicable tubing material	Nylon, Soft nylon, Polyurethane ^{*1} , FEP, PFA


^{*1}: Use caution at the max. operating pressure when using soft nylon or polyurethane tubing. (Refer to the catalogue on www.smc.eu for details.)

Flow Rate and Sonic Conductance

Model		AS1002FG-□A			AS2002FG-□A		AS2052FG-□A		AS3002FG-□A				AS4002FG-□A	
Tubing O.D.	Metric size	Ø 3.2	Ø 4	Ø 6	Ø 4	Ø 6	Ø 6	Ø 8	Ø 6	Ø 8	Ø 10	Ø 12	Ø 10	Ø 12
	Inch size	Ø 1/8"	Ø 5/32"	Ø 1/4"	Ø 5/32"	Ø 1/4"	Ø 1/4"	Ø 5/16"	Ø 1/4"	Ø 5/16"	Ø 3/8"	—	Ø 3/8"	Ø 1/2"
C values: Sonic conductance dm ³ /(s·bar)	Free flow	0.3	0.4	0.6	0.4	0.6	1.0	1.2	1.1	1.6	2.2	2.6	2.4	3.5
	Controlled flow	0.3			0.4	0.6	1.0	1.2	1.3	1.9	2.7	3.3	2.8	4.1
b values: Critical pressure ratio	Free flow	0.3	0.2		0.3	0.1	0.2		0.2				0.3	0.2
	Controlled flow	0.2	0.3	0.4	0.2		0.2	0.3	0.1		0.2		0.1	0.2

^{*}: C and b values are for controlled flow with the needle fully open and free flow with the needle fully closed.

Flow Direction
Symbol on Body



How to Order

AS 200 2 F G - 06 A

Body size

100	M5 standard
200	1/8 standard
205	1/4 standard
300	3/8 standard
400	1/2 standard

Push-lock type

Applicable tubing O.D.^{*1}

Metric size	Inch size
23	Ø 3.2 ^{*2}
04	Ø 4
06	Ø 6
08	Ø 8
10	Ø 10
12	Ø 12
01	Ø 1/8"
03	Ø 5/32"
07	Ø 1/4"
09	Ø 5/16"
11	Ø 3/8"
13	Ø 1/2"

^{*1}: For selecting applicable tubing O.D., refer to the "Model" shown above.

^{*2}: Use Ø 1/8" tubing.

With One-touch fittings

Stainless steel type
(Stainless steel 303)

^{*}: The material can be visually identified by colour of the release button.


Stainless steel type: White

^{*}: White is also used for inch size.

Dimensions, flow rate characteristics and options are the same as standard product (brass needle guide).

AS-FG Series


Construction

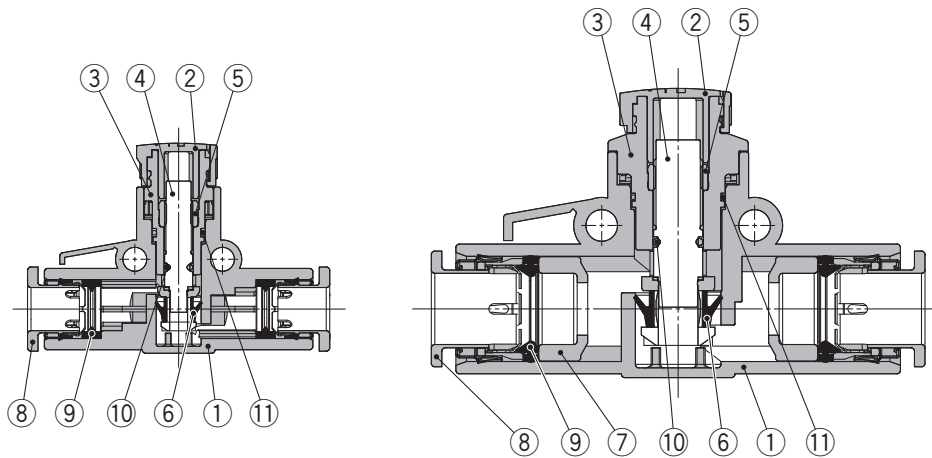

Component Parts

No.	Description	Material	Note
1	Body A	PBT	
2	Knob	POM	
3	Body B	PBT	
4	Needle	PBT	
5	Needle guide	Stainless steel 303	
6	U-seal	HNBR	
7	Spacer	PBT	
8	Cassette	—	
9	Seal	NBR	
10	O-ring	NBR	
11	O-ring	NBR	


L-Bracket



Component Parts

No.	Description	Material
1	Bracket	Steel strip

DIN Rail Mounting Bracket



Component Parts

No.	Description	Material
1	Bracket	Steel strip
2	Cross recessed round head screw	Steel wire
3	Clasp	Steel strip

Related Equipment


Holder for Speed Controller *TMH Series*

A holder for securing a speed controller with One-touch fittings (In-line type)

Possible to hold a single controller.



Holder mounting



Specifications

Ambient temperature	-20 to 60 °C
Material	Polypropylene
Colour	White

Accessory: Cross Recessed Round Head Screw for Mounting (Zinc chromated)

Part no.		Size (Nominal x Length)	Quantity
Metric size	Inch size		
TMH-23J	TMH-01J	M3 x 15	1
TMH-04J	TMH-03J		
TMH-06J	TMH-07J	M3 x 20	
TMH-06	TMH-07	M4 x 25	
TMH-08	TMH-09		
TMH-10	—	M4 x 35	
TMH-12	TMH-13		

Series

Select the applicable holder/TMH for each speed controller from the table below.

Metric Size


Tubing size	Applicable tubing					
	23	04	06	08	10	12
Applicable model	Ø 3.2	Ø 4	Ø 6	Ø 8	Ø 10	Ø 12
AS1002F□	TMH-23J	TMH-04J	TMH-06J			
AS2002F□						
AS2052F□			TMH-06	TMH-08		
AS3002F□			TMH-07			
AS4002F□					TMH-10	TMH-12 TMH-13

*: The applicable TMH for the AS1002F□-02 is not available.

Inch Size

Tubing size	Applicable tubing					
	01	03	07	09	11	13
Applicable model	Ø 1/8"	Ø 5/32"	Ø 1/4"	Ø 5/16"	Ø 3/8"	Ø 1/2"
AS1002F□	TMH-01J	TMH-03J	TMH-07J			
AS2002F□						
AS2052F□			TMH-07	TMH-09		
AS3002F□						
AS4002F□					TMH-10	TMH-13

Dimensions

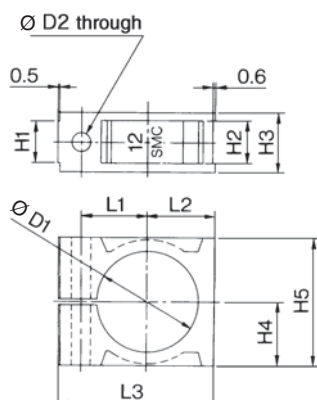

Part no.		Ø D1	Ø D2	H1	H2	H3	H4	H5	L1	L2	L3	Symbol
Metric size	Inch size											
TMH-23J	TMH-01J	8.5	3.3	4.5	4.6	7.5	6	12	7.2	6.6	18	1/8J
TMH-04J	TMH-03J	9.4										4 5/32J
TMH-06J	—	11.7	3.3	6.3	6.4	9.3	7.7	15.4	8.5	8.3	21	6J
—	TMH-07J	12.1										1/4J
TMH-06	—	13.1	4.3	7.1	7.2	11.1	10	20	11	10.6	26.5	6
—	TMH-07	13.5										1/4
TMH-08	TMH-09	15.5										8 5/16
TMH-10	—	18.8	4.3	9.5	9.6	13.5	14	28	14.2	14.6	34	10
TMH-12	—	21.2										12
—	TMH-13	22										1/2

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

- Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
- Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
- Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

Warning

- The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.**
Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.
- Only personnel with appropriate training should operate machinery and equipment.**
The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.
- Do not service or attempt to remove product and machinery/equipment until safety is confirmed.**
 - The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 - When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 - Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.**
 - Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
 - Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalogue.
 - An application which could have negative effects on people, property, or animals requiring special safety analysis.
 - Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

- The product is provided for use in manufacturing industries.**
The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

- *1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots - Safety.
etc.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.
Read and accept them before using the product.

Limited warranty and Disclaimer

- The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.

*2) **Vacuum pads are excluded from this 1 year warranty.**

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

- The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

SMC Corporation (Europe)

Austria	☎ +43 (0)2262622800	www.smc.at	office@smc.at	Lithuania	☎ +370 5 2308118	www.smclt.lt	info@smclt.lt
Belgium	☎ +32 (0)33551464	www.smcpnautics.be	info@smcpneumatics.be	Netherlands	☎ +31 (0)205318888	www.smcpnautics.nl	info@smcpneumatics.nl
Bulgaria	☎ +359 (0)2807670	www.smc.bg	office@smc.bg	Norway	☎ +47 67129020	www.smc-norge.no	post@smc-norge.no
Croatia	☎ +385 (0)13707288	www.smc.hr	office@smc.hr	Poland	☎ +48 222119600	www.smc.pl	office@smc.pl
Czech Republic	☎ +420 541424611	www.smc.cz	office@smc.cz	Portugal	☎ +351 226166570	www.smc.eu	postpt@smc.smces.es
Denmark	☎ +45 70252900	www.smc.dk	smc@smcdk.com	Romania	☎ +40 213205111	www.smcromania.ro	smcromania@smcromania.ro
Estonia	☎ +372 6510370	www.smcpnautics.ee	smc@smcpneumatics.ee	Russia	☎ +7 8127185445	www.smc-pneumatik.ru	info@smc-pneumatik.ru
Finland	☎ +358 207513513	www.smc.fi	smc@smc.fi	Slovakia	☎ +421 (0)413213212	www.smc.sk	office@smc.sk
France	☎ +33 (0)164761000	www.smc-france.fr	info@smc-france.fr	Slovenia	☎ +386 (0)73885412	www.smc.si	office@smc.si
Germany	☎ +49 (0)61034020	www.smc.de	info@smc.de	Spain	☎ +34 902184100	www.smc.eu	post@smc.smces.es
Greece	☎ +30 210 2717265	www.smcHELLAS.gr	sales@smcHELLAS.gr	Sweden	☎ +46 (0)86031200	www.smc.nu	post@smc.nu
Hungary	☎ +36 23511390	www.smc.hu	office@smc.hu	Switzerland	☎ +41 (0)523963131	www.smc.ch	info@smc.ch
Ireland	☎ +353 (0)14039000	www.smcpnautics.ie	sales@smcpneumatics.ie	Turkey	☎ +90 212 489 0 440	www.smcpnomatik.com.tr	info@smcpnomatik.com.tr
Italy	☎ +39 0292711	www.smcitalia.it	mailbox@smcitalia.it	UK	☎ +44 (0)845 121 5122	www.smcpnautics.co.uk	sales@smcpneumatics.co.uk
Latvia	☎ +371 67817700	www.smc.lv	info@smc.lv				

SMC CORPORATION Akihabara UDX 15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN Phone: 03-5207-8249 FAX: 03-5298-5362